Program Complot
(Version 2004-1)

by

Dermott E. Cullen
Lawrence Livermore National Lab
L-159
P.O. Box 808
Livermore, CA 94550
U.S.A.
Tele: 925-423-7359
E.Mail: cullen1@llnl.gov
Website: www.llnl.gov/cullen1

Press Mouse Button to Start.

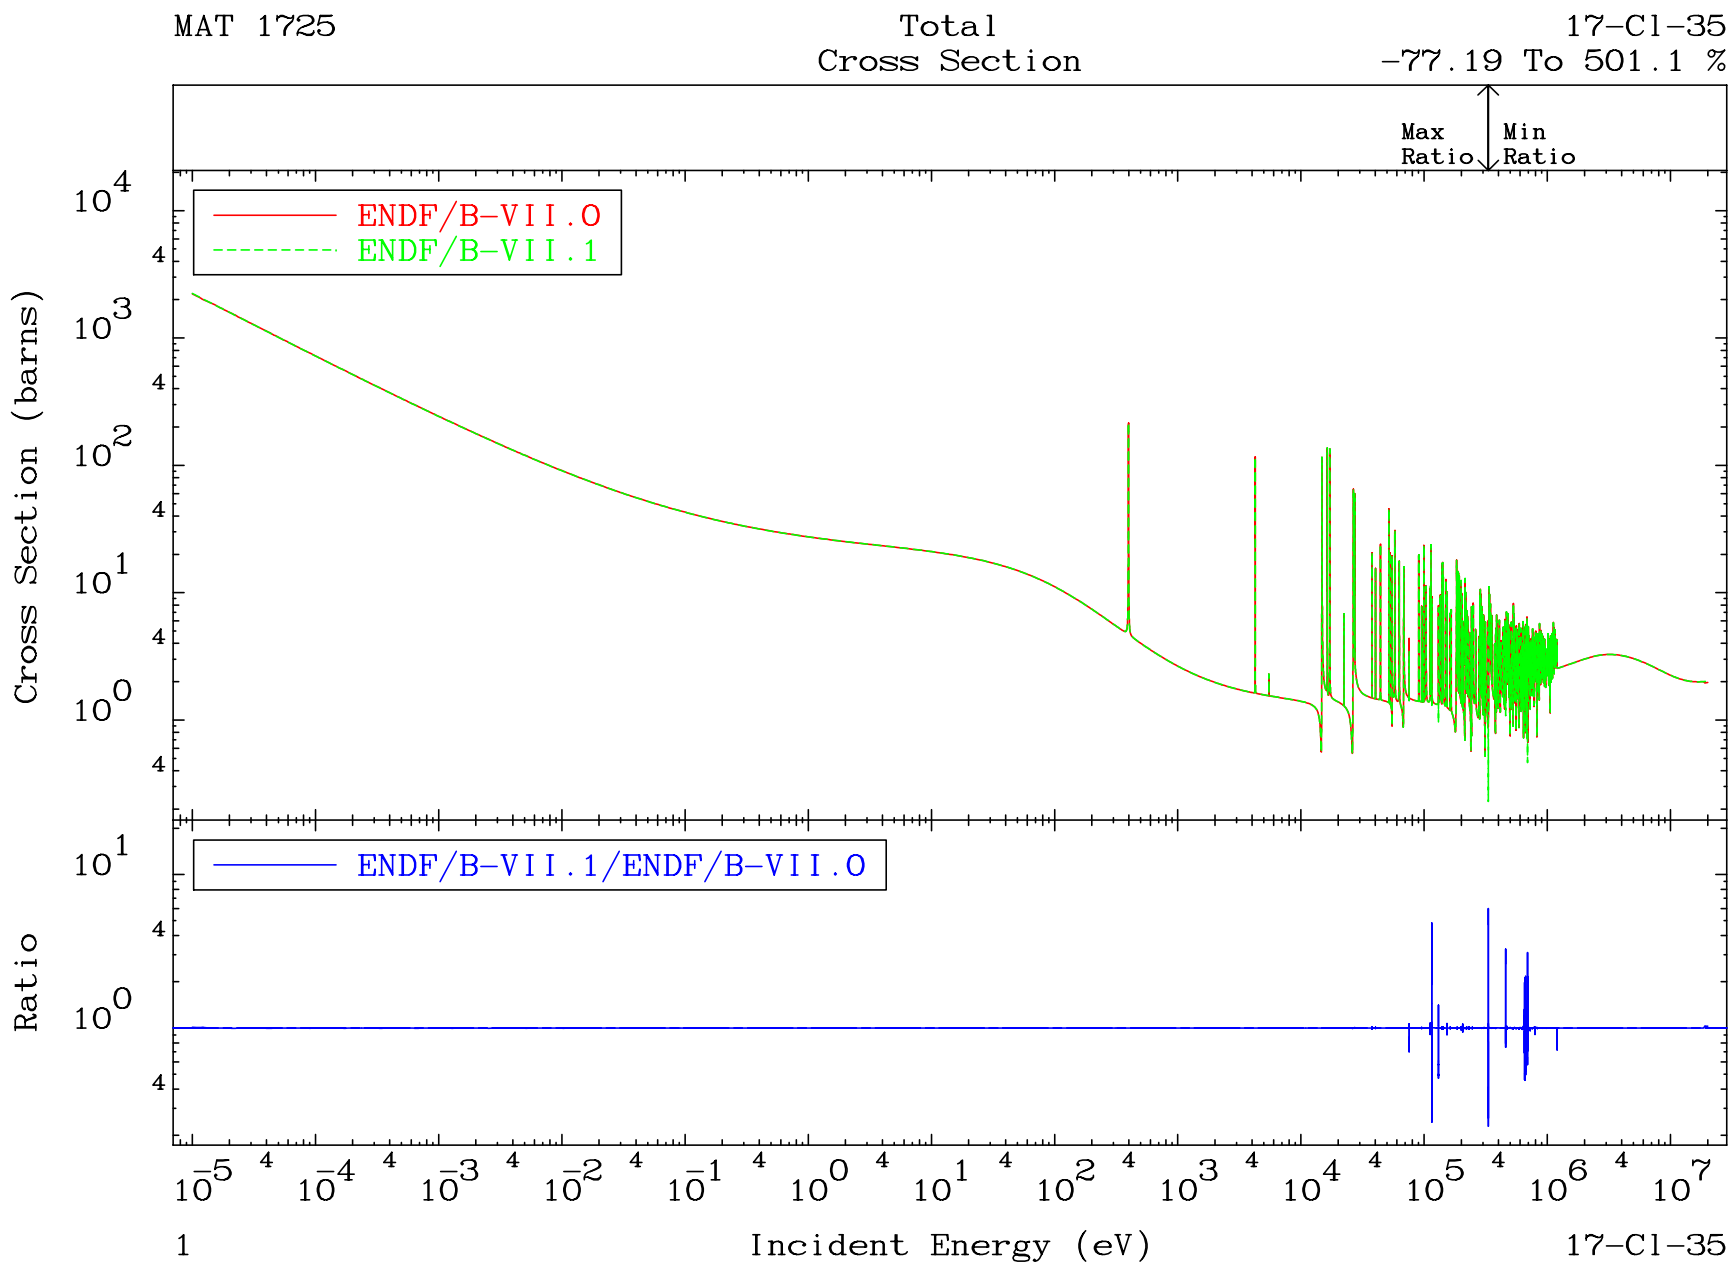
MAT 1725
Total
Cross Section
17-Cl-35
-77.19 To 501.1 %
Max Ratio
Min Ratio
ENDF/B-VII.0
ENDF/B-VII.1
Cross Section (barns)
ENDF/B-VII.1/ENDF/B-VII.0
Ratio
Incident Energy (eV)
1
17-Cl-35

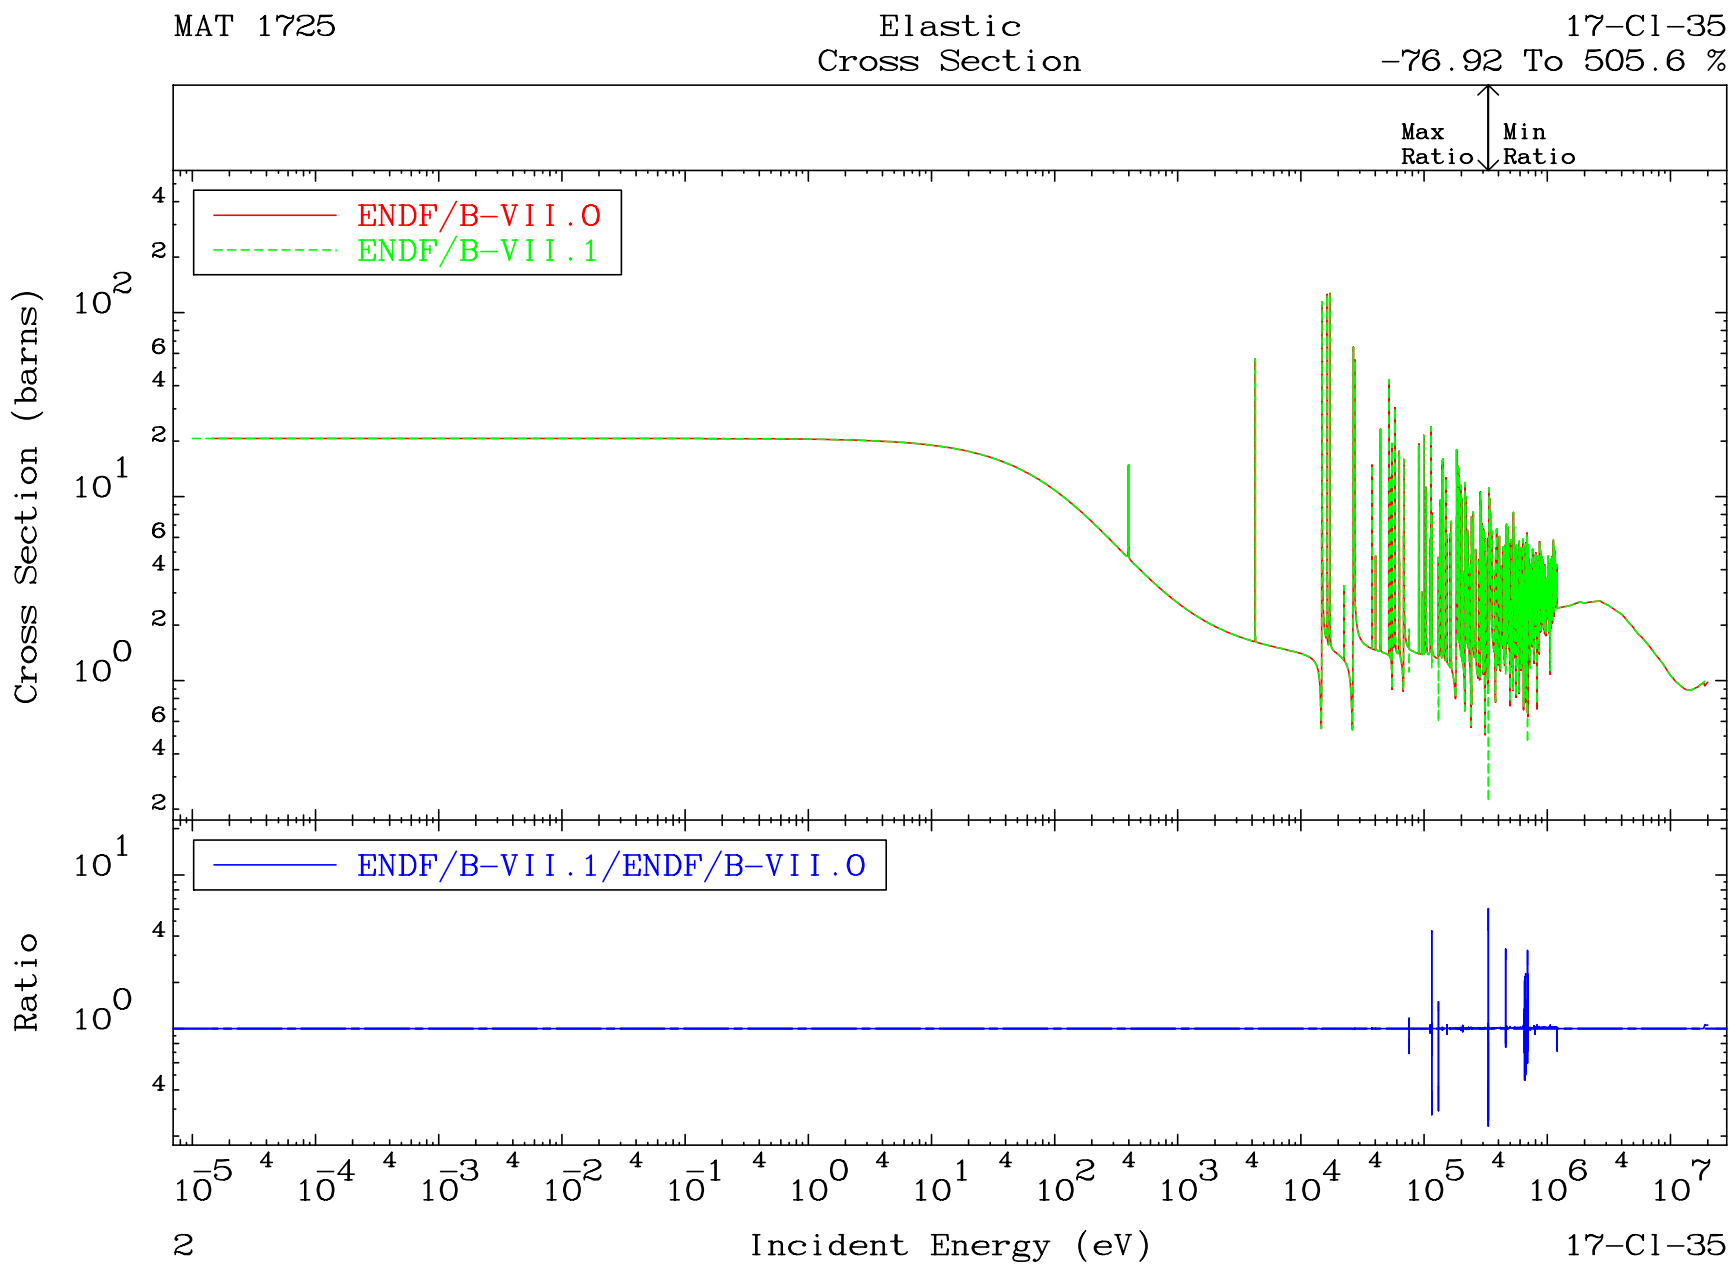
MAT 1725
Elastic
Cross Section
17-Cl-35
-76.92 To 505.6 %
Max Ratio
Min Ratio
ENDF/B-VII.0
ENDF/B-VII.1
Cross Section (barns)
ENDF/B-VII.1/ENDF/B-VII.0
Ratio
Incident Energy (eV)
2
17-Cl-35

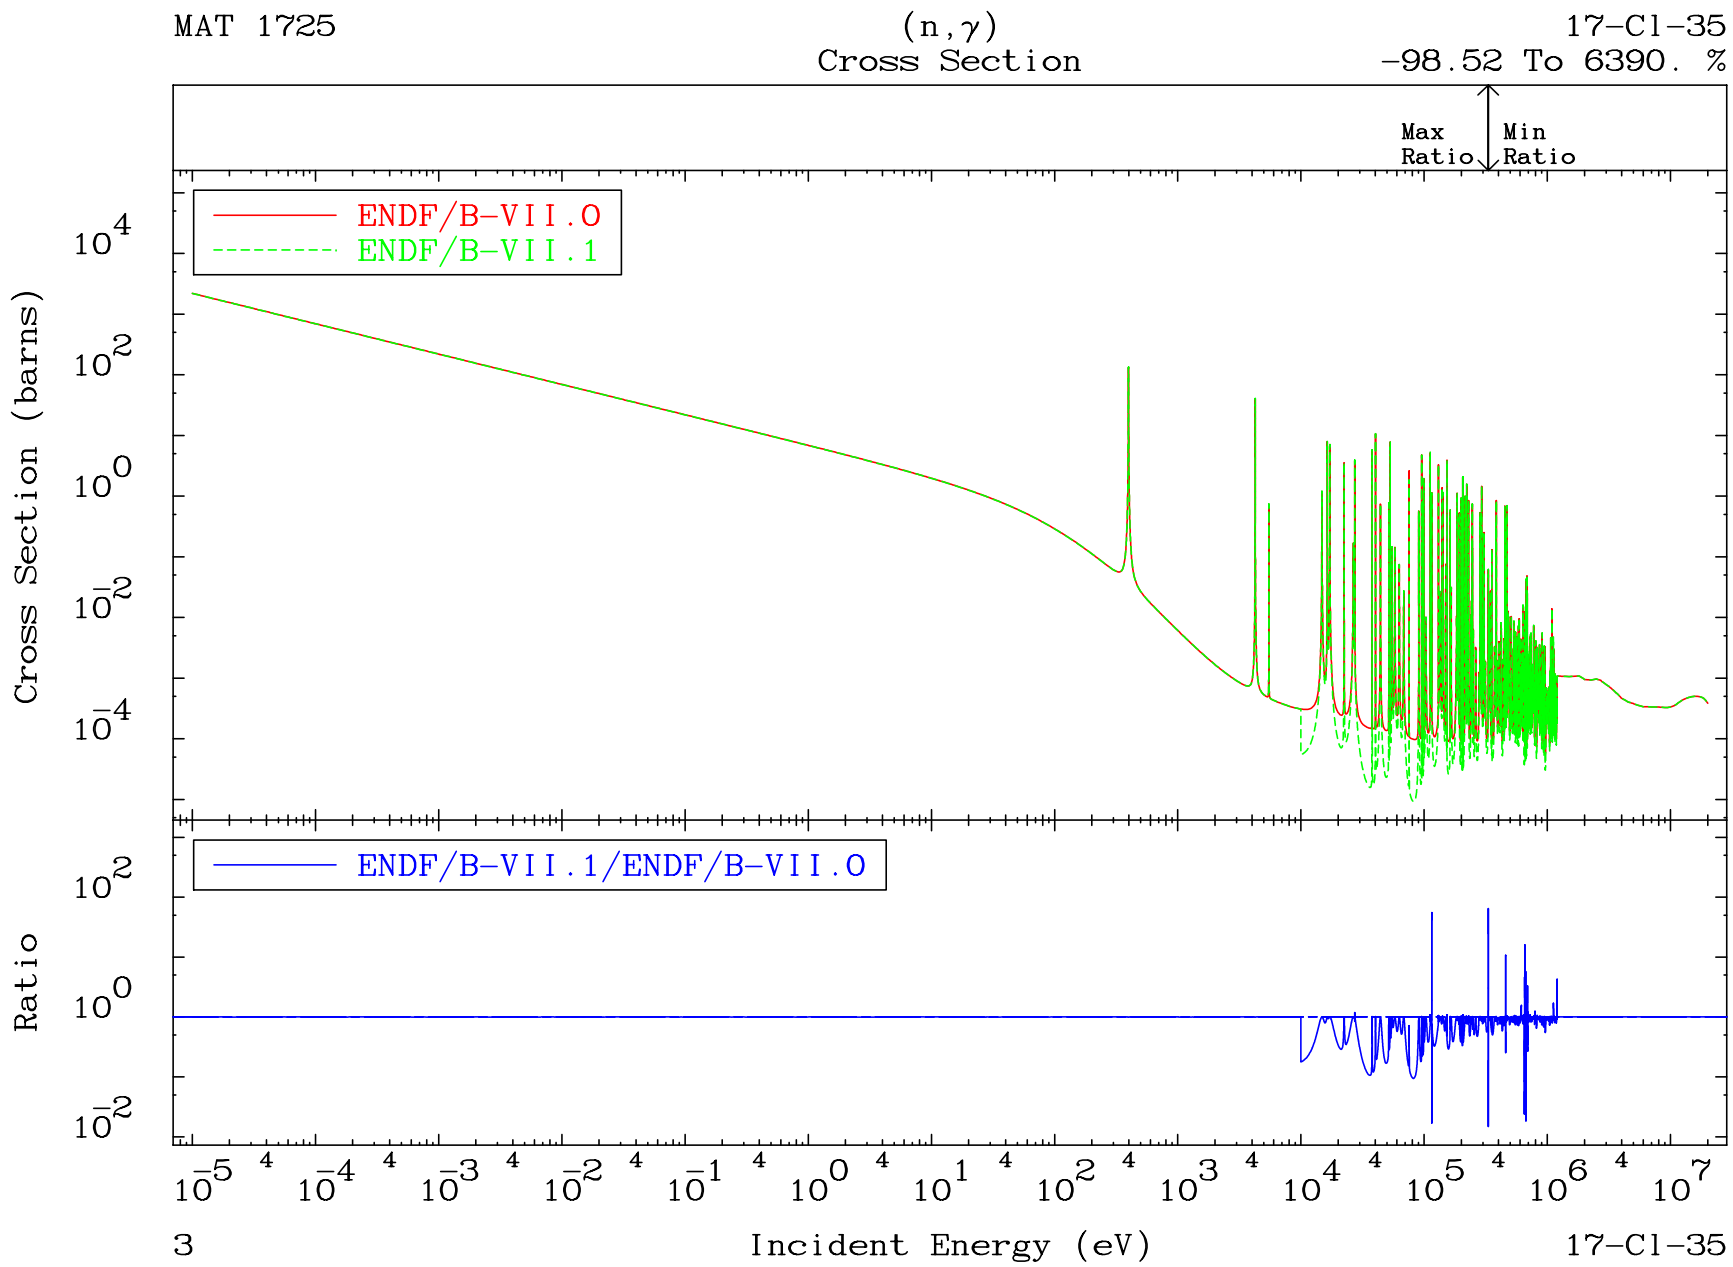
MAT 1725
(n,γ)
Cross Section
17-Cl-35
-98.52 To 6390. %
Max Ratio
Min Ratio
ENDF/B-VII.0
ENDF/B-VII.1
Cross Section (barns)
ENDF/B-VII.1/ENDF/B-VII.0
Ratio
Incident Energy (eV)
3
17-Cl-35

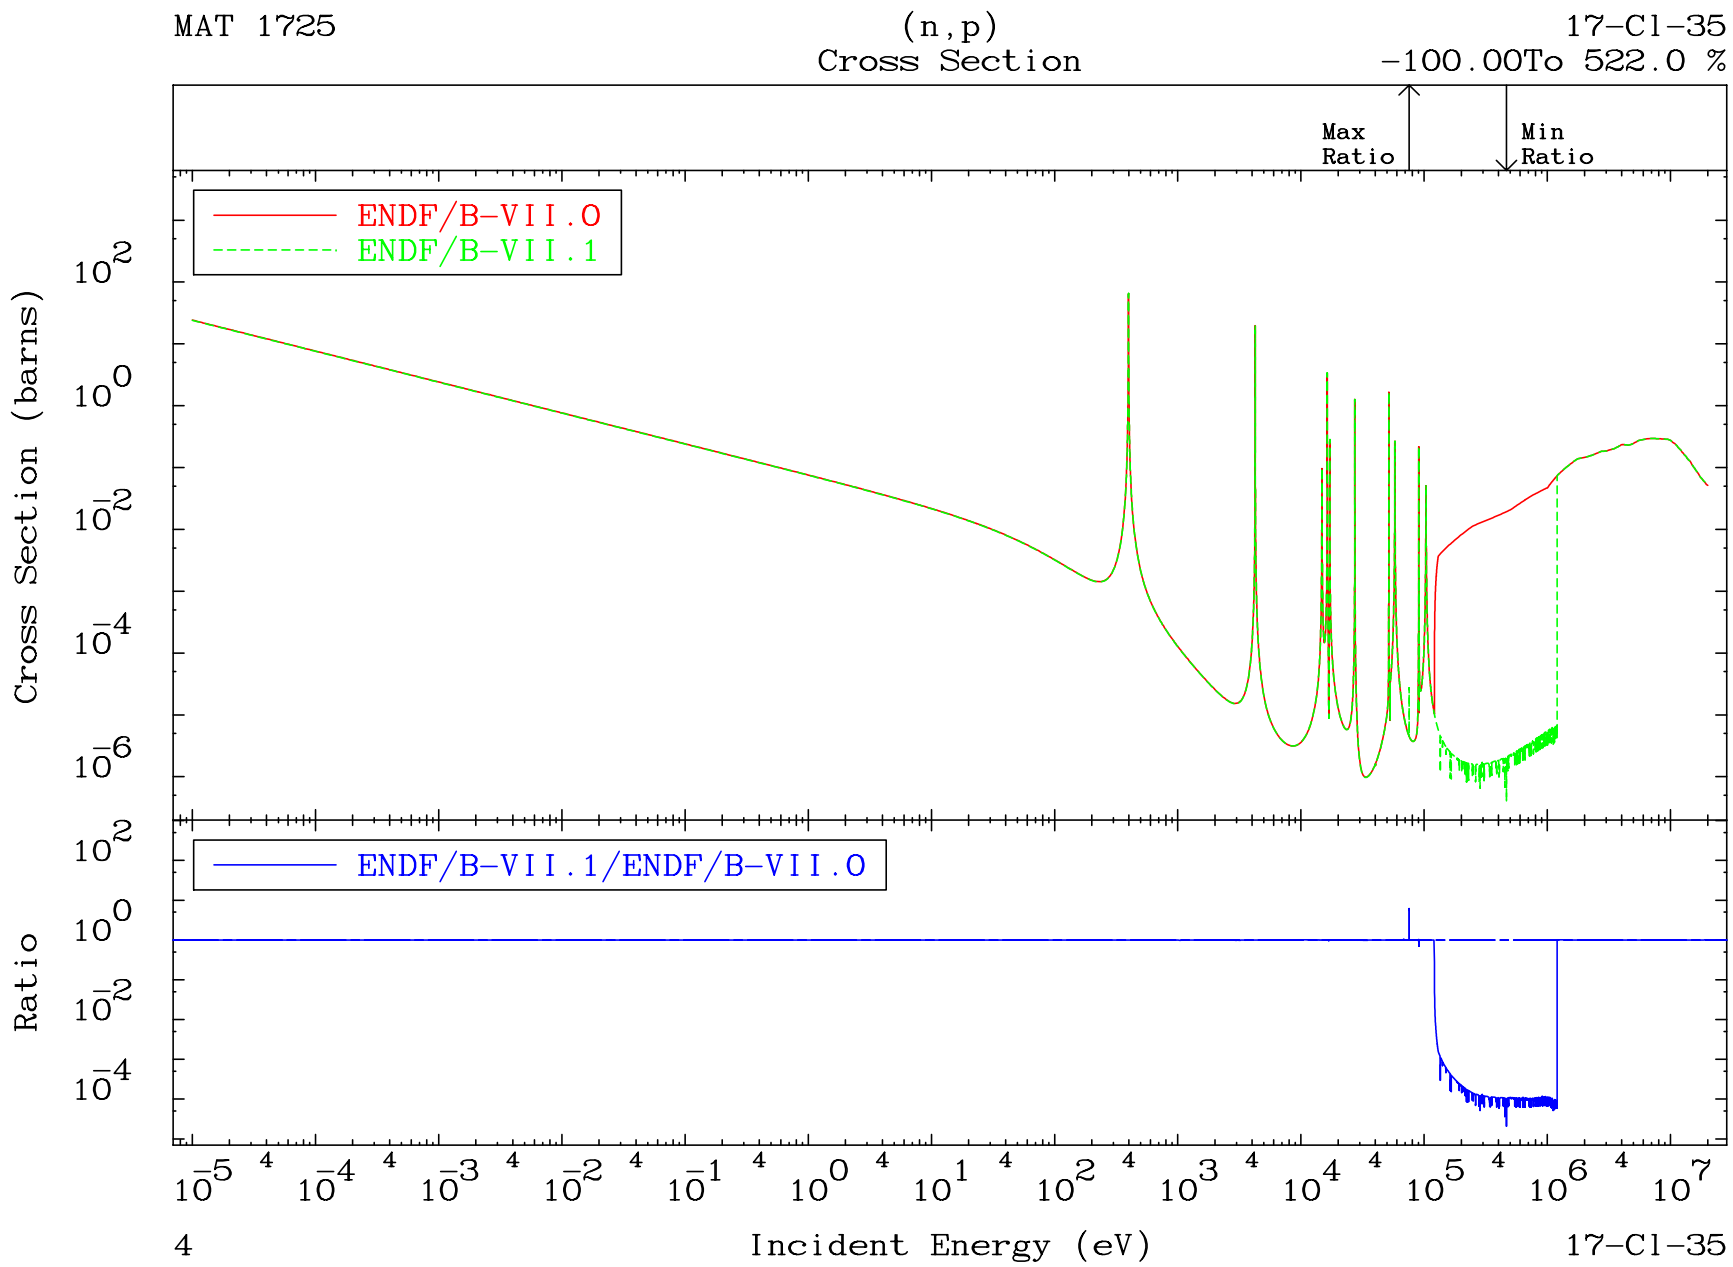
MAT 1725
(n,p)
Cross Section
17-Cl-35
-100.00To 522.0 %
Max Ratio
Min Ratio
ENDF/B-VII.0
ENDF/B-VII.1
Cross Section (barns)
ENDF/B-VII.1/ENDF/B-VII.0
Ratio
Incident Energy (eV)
4
17-Cl-35

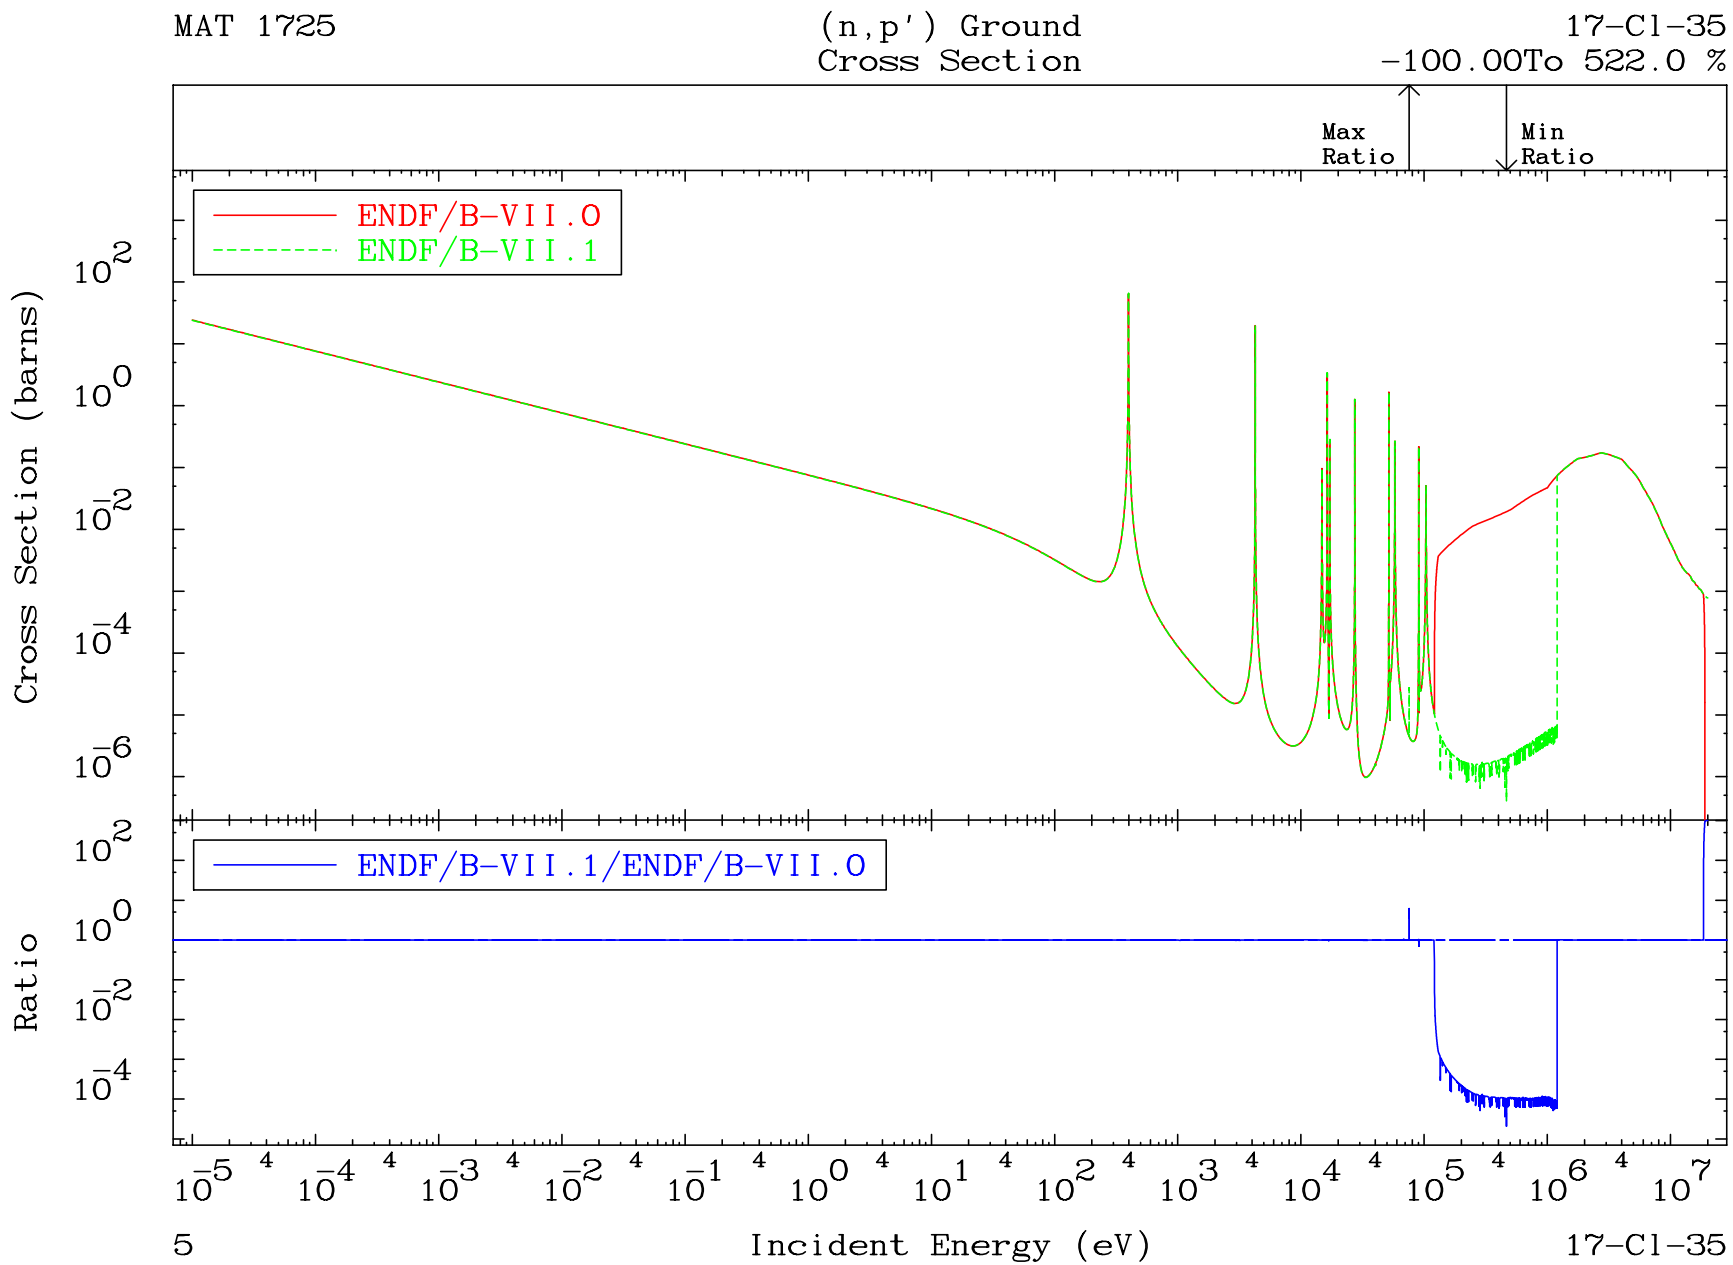
MAT 1725
(n,p') Ground
Cross Section
17-Cl-35
-100.00To 522.0 %
Max
Ratio
Min
Ratio
ENDF/B-VII.0
ENDF/B-VII.1
Cross Section (barns)
ENDF/B-VII.1/ENDF/B-VII.0
Ratio
Incident Energy (eV)
5
17-Cl-35